

NOTES:
1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN

2-
MTP:
IL<0.35dB at 1310nm and 1550nm - connector value according IEC 61300-3-4 method B
RL>50dB at 1310nm and 1550nm - connector value according IEC 61300-3-6

LC:
IL<0.25dB at 1310nm and 1550nm - connector value according IEC 61300-3-4 method B
RL>50dB at 1310nm and 1550nm - connector value according IEC 61300-3-6


3 - Temperature range: operation: -20°C to +70°C (PVC)
 storage: -40°C to +70°C (PVC)
 installation: -0°C to +70°C (PVC)

The Fanoutcable is available in the following variants:

- MTP 24 to 24 x LC
- MTP 24 to 24 x ST
- MTP 24 to 24 x SC

All variants are available in SINGLEMODE and MULTIMODE.

CONNECTION TABLE		
MTP / LC	FIBER COLOUR	
1	BLUE	/
2	ORANGE	/
3	GREEN	/
4	BROWN	/
5	GREY	/
6	WHITE	/
7	RED	/
8	TRANSP.	/
9	YELLOW	/
10	PURPLE	/
11	PINK	/
12	AQUA	/
13	BLUE	/
14	ORANGE	/
15	GREEN	/
16	BROWN	/
17	GREY	/
18	WHITE	/
19	RED	/
20	BLACK	/
21	YELLOW	/
22	PURPLE	/
23	PINK	/
24	AQUA	/

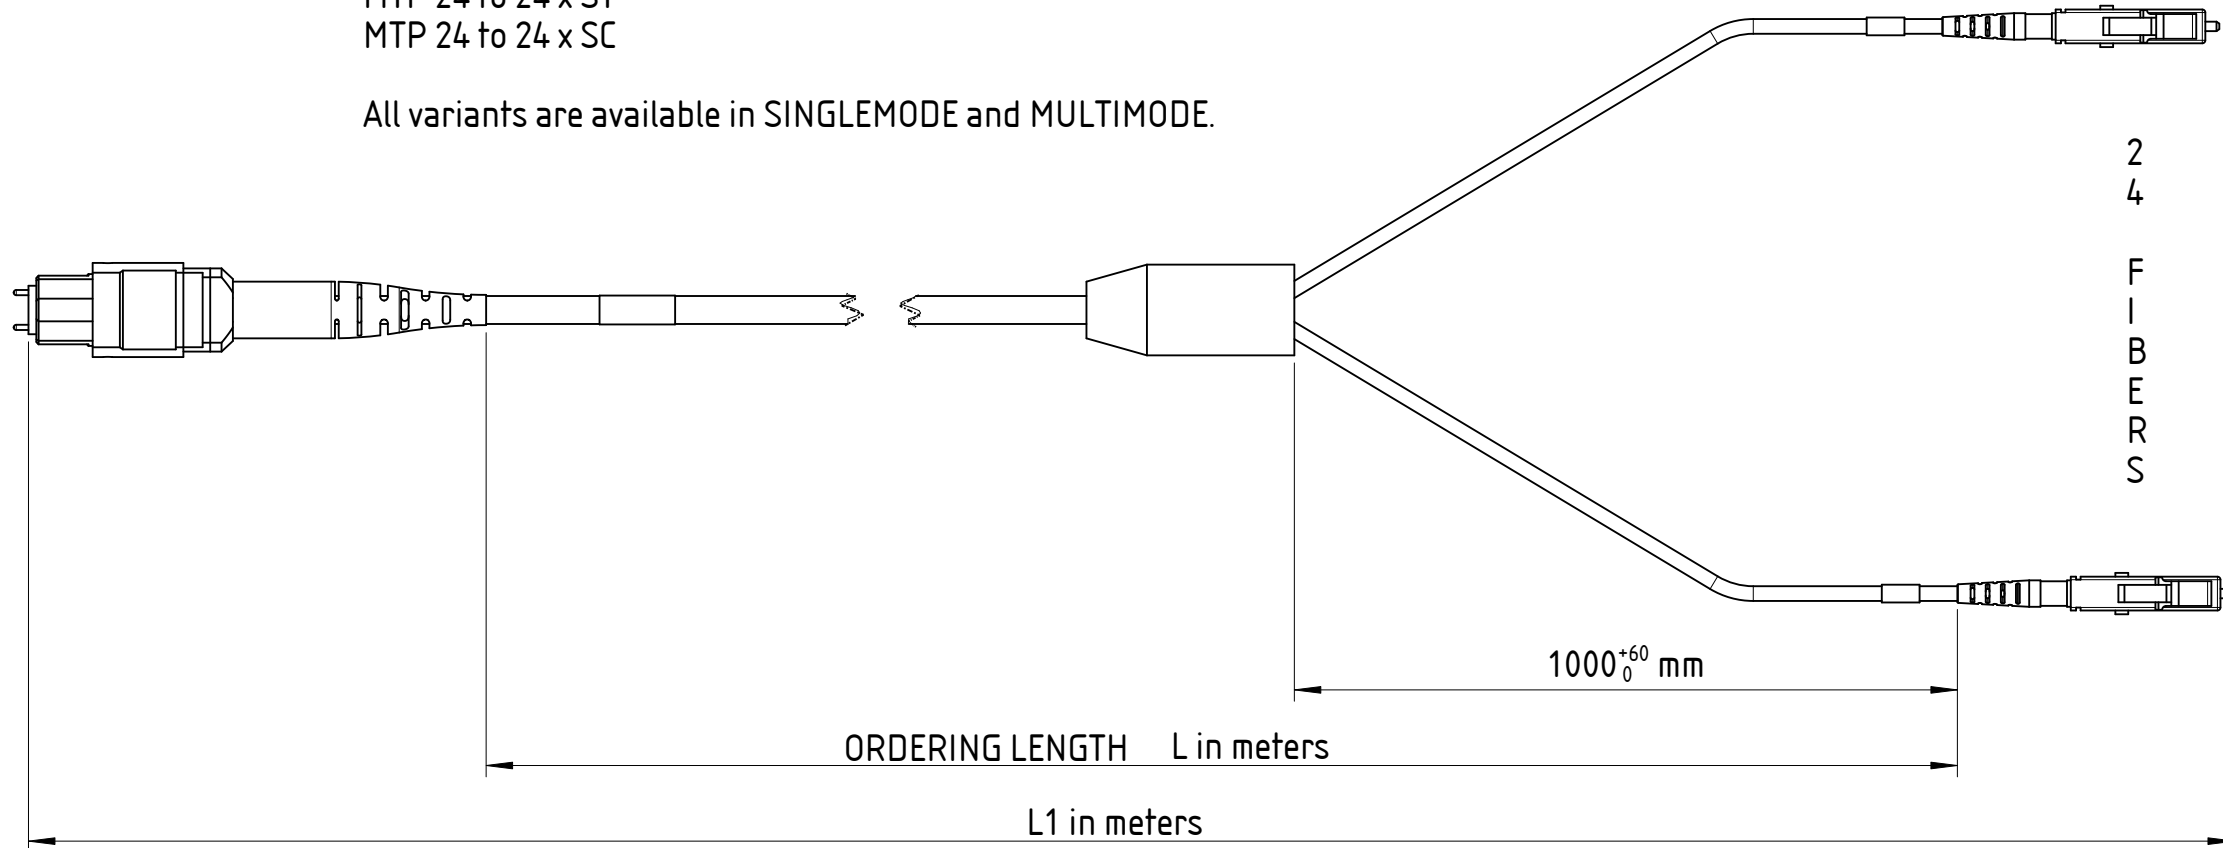

Sheet Number 1/1	Projection 	Scale 1:1	Format A3	General Tolerancing ISO 2768 mK	
Description			Created on/by	17.06.2024	Schuster R.
1x24f MTP(M) to 24x* 24F FANOUT CABLE			Approved on/by		
			Article ID	Model ID	Drawing ID
Status	Revision	ECN Number	Neutrik Group		
-	-	-			